


EXHIBIT H, BEE BAYOU SITE, EXISTING AND PROPOSED WASTEWATER INFRASTRUCTURE MAP



Bee Bayou Sewer Improvements, New 21,000' Force Main - Estimated Cost				
Item	Quantity	Unit	Unit Cost	Extended Cost
250,000 GPD Pump Station at Site	1	LS	\$ 100,000	\$ 100,000
6" PVC FM	20,030	LF	\$ 15	\$ 300,450
6" PE FM	970	LF	\$ 20	\$ 19,400
6" HDD	770	LF	\$ 50	\$ 38,500
8" J&B	200	LF	\$ 100	\$ 20,000
8" Steel Casing	200	LF	\$ 100	\$ 20,000
Connect to Existing LS	1	EA	\$ 1,000	\$ 1,000
Utility Conflicts	1	LS	\$ 10,000	\$ 10,000
Testing Force Main	21,000	LF	\$ 2	\$ 42,000
Cleanup Force Main	21,000	LF	\$ 2	\$ 42,000
Mobilization	1	LA	\$ 50,000	\$ 50,000
Total Construction Cost				\$ 643,350
Contingencies				\$ 64,335
Estimated Total Construction Cost				\$ 707,685
Administration				\$ 5,000
Permits				\$ 15,000
Engineering				
Preliminary			\$ 24,275	
Final			\$ 18,206	
Bidding			\$ 6,069	
Construction Administration			\$ 12,137	
Total Engineering Cost				\$ 60,687
Inspection				\$ 50,000
Total Estimated Project Cost				\$ 838,372

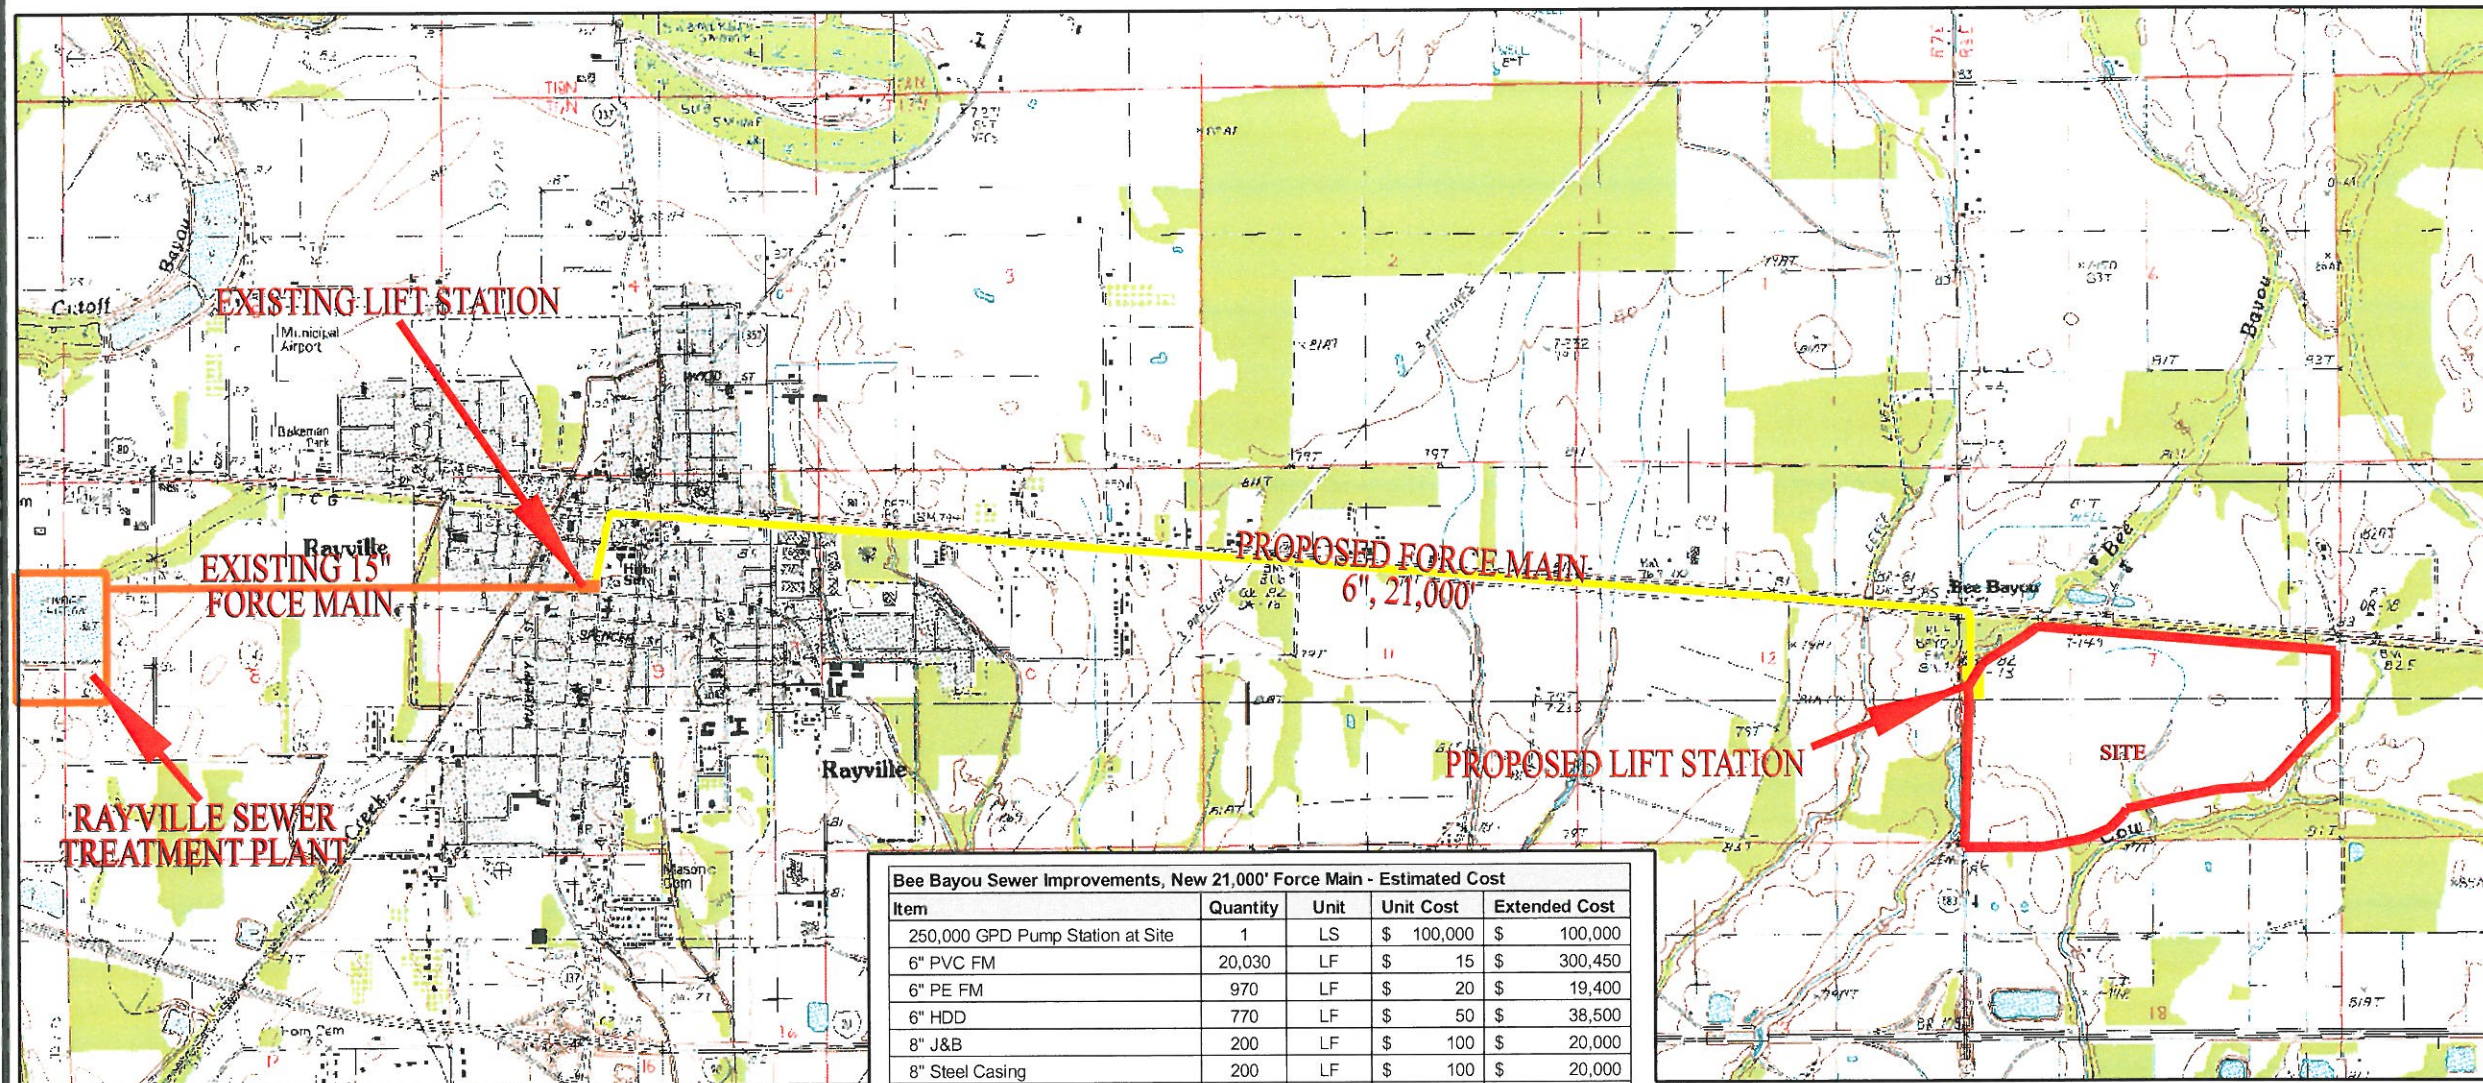

LEGEND

