

Exhibit I - Proposed Waste Water Service Plan & Letter

August 25, 2015

Mr. Larry Henson Louisiana Economic Development (LED) 1051 North Third St. Baton Rouge, LA 70802-5239

Parks & Planning

Mr. David Conner Southwest Economic Development Alliance (SWLA) P.O. Box 3110

Transportation

Lake Charles, LA 70602

Site Development

RE: B85-Chennault Site 5 (160 Acres)
Wastewater Service Plan

Utility Systems

Dear Gentlemen:

Land Surveying

SJB Group, LLC (SJB) has been authorized by Louisiana Economic Development (LED and Southwest Louisiana Economic Alliance (SWLA) to perform due diligence investigations to determine the existence of fatal flaws, if any, that would inhibit the development of Chennault Site 5 (+/- 160 acres), located southeast of the City of Lake Charles in Calcasieu Parish, Louisiana.

Construction Services

The site is not currently provided with wastewater collection or treatment services, nor is there a possibility for connection to a municipal system. The attached exhibit illustrates the approximate location of a 250,000 GPD sanitary wastewater treatment plant (WWTP) that would be required in order to provide for such service. The projected receiving stream is Black Bayou. Please note that this OPC does not include collection system piping and pumping systems.

Environmental Services

We anticipate that this system will consist of an extended aeration package plant that will include the following equipment and unit processes: Bar rack for preliminary screening, aeration tank with air diffusers, hopper bottom clarifier with an airlift sludge removal and skimmer system, aerated sludge holding tank, hypochlorinator, gravity sand filtration, duplex rotary belt-driven blowers, central control panel, aluminum blower houses, galvanized access walkway with galvanized mechanical pipe handrails, a stairway, and 6-inch diameter Schedule 40 PVC effluent discharge. The budgetary OPC for this WWTP and the associated discharge piping, delivered and installed, is \$1,150,420. As the anticipated WWTP is modular, pre-fabricated, and delivered to the site, the construction schedule would be anticipated to be 120-days from the date the notice to proceed is issued to a vendor.

Real Estate Services

P. O. Box 1751 Baton Rouge, Louisiana 70821-1751 (225) 769-3400 Fax (225) 769-3596

www.sjbgroup.com


Please feel free to contact me at (225) 769-3400, at any time, should you have any questions or need further information.

Sincerely,

SJB GROUP, LLC

Michael L. Thompson, P.E., C.E.T. Engineering Department Manager

Exhibit I - Proposed Waste Water Service Plan

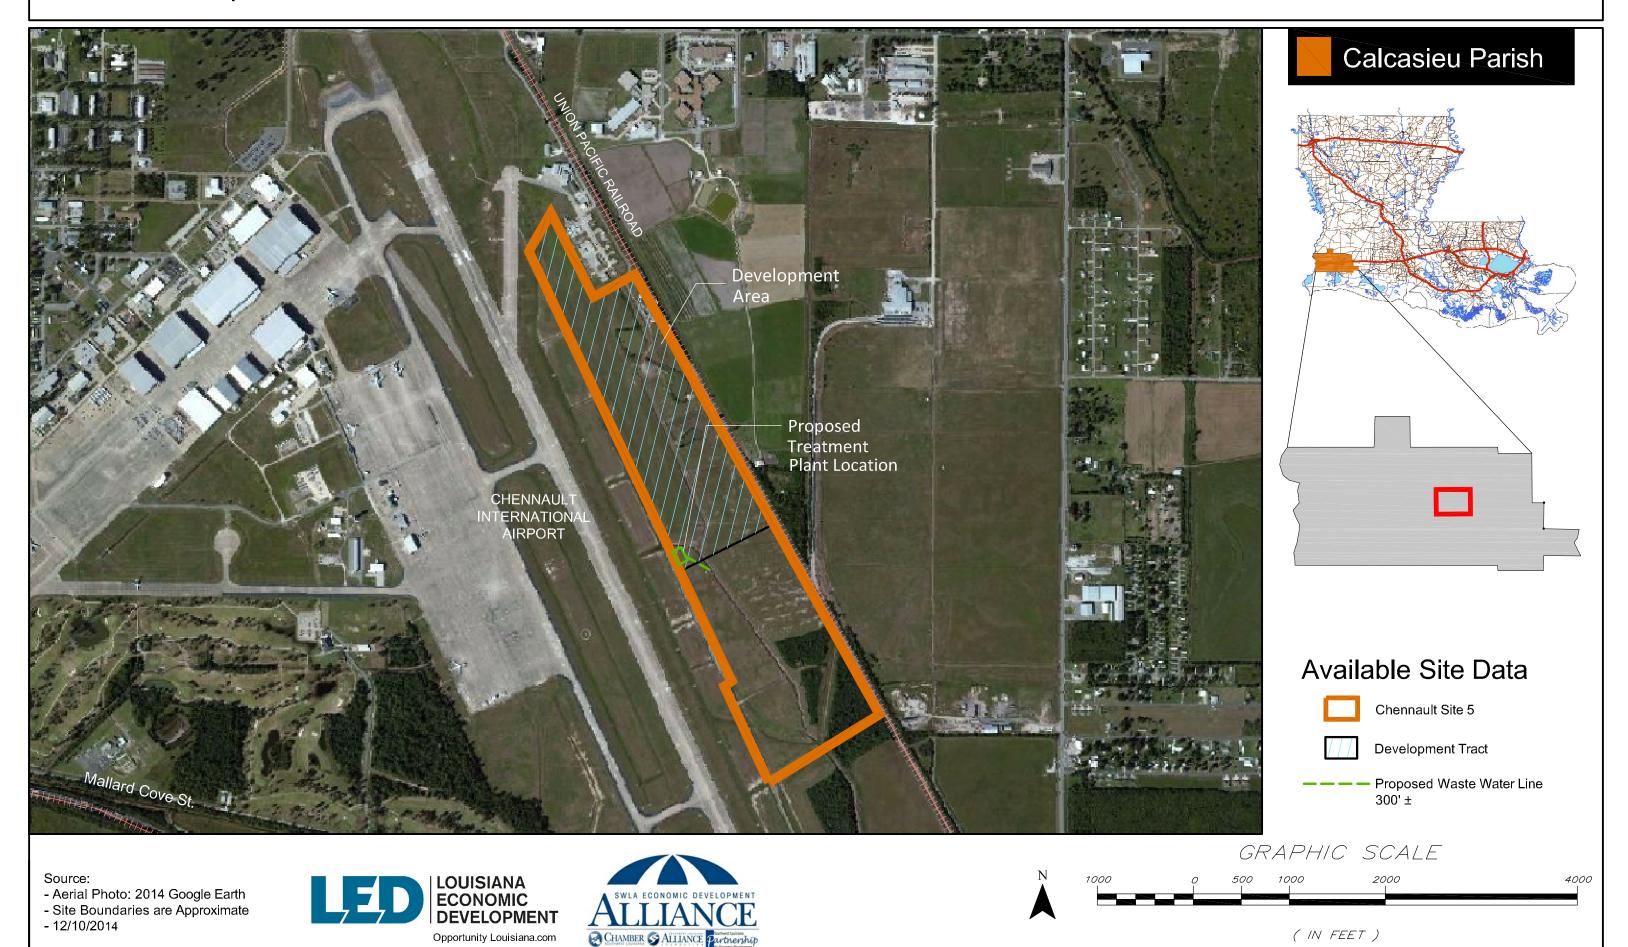

 $1 \ INCH = 1000 \ ft.$